


Introducing the most reliable polycrystalline PV module



SSP60C Series - 230/245 watts

100%
independently
re-tested

Unique quality: 100% re-test on EVERY module by a third-party testing company (STS Certified)

15.1%
module
efficiency

Up to 15.1% module efficiency and lower operating cell temperature: higher performance to maximize your electricity production for each m²

-0/+3%
positive
tolerance

Guaranteed power output: positive tolerance on each panel (-0/+3%)

25
year
warranty

10-year product warranty
Linear 25-year power output warranty

N°1 in quality

Launched in 2012, the STS Testing Campaign consists in testing randomly-selected solar panels on a mass-production scale, in order to provide a benchmarking of PV makers' real quality.

The results speak for themselves; Senersun outranks the competition.


Safely packed

Because packaging is an essential part of the value chain, Senersun has specifically designed its packaging to ensure the protection of your panels until their destination.

Just another solution we brought up to guarantee our panels' limitless quality.

Linear power warranty

Senersun panels will produce up to 103% of their rated power output at delivery. During the first year, Senersun guarantees that the actual power cannot differ by more than 3% from the specified power. From the second year onwards, the power will not decrease by more than 0.7% of the rated power per year.

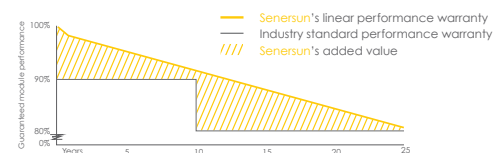

Visit www.senersun.com for more information.

 **senersun**

Specifications

Electrical characteristics

Model	SSP60C-230	SSP60C-235	SSP60C-240*	SSP60C-245**
Maximum Power (Pmax)	230Wp	235Wp	240Wp	245Wp
Power Density (Wp/m ²)	141.4	144.4	147.5	151
Maximum Power Voltage (Vmp)	30.12V	30.22V	30.33V	30.58V
Maximum Power Current (Imp)	7.64A	7.78A	7.91A	8.01A
Open-Circuit Voltage (Voc)	36.96V	37.08V	37.3V	38.64V
Short-Circuit Current (Isc)	8.3A	8.45A	8.54A	8.69A
Cell Efficiency	16.2%	16.6%	16.9%	17.3%
Module Efficiency	14.1%	14.4%	14.8%	15.1%
No. of Diodes	6			
Maximum System Voltage	1000VDC / 600VDC (UL)			
Maximum Series Fuse Rating	15A			
Power Tolerance	-0/+3%			
Temperature Coefficients of Pmax	-0.45%/°C			
Temperature Coefficients of Voc	-0.34%/°C			
Temperature Coefficients of Isc	+0.09%/°C			
Nominal Operating Cell Temperature (NOCT)	45±2°C			

* UL certification not available
**UL and MCS certifications not available

Measured at STC Conditions: Irradiance: 1,000W/m² - AM 1.5 Spectrum - Temperature: 25°C
Electrical parameters may vary by ± 5%



Mechanical characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of Cells	60 (6×10)
Dimensions	1640×992×50mm
Weight	21 kg (46.2 lbs)
Front Glass	3.2mm High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 4.0mm ² Single Core Length 900mm
Connectors	MC4 Compatible
Back Sheet	TPT

Packaging configuration

Pallet Load	20 pcs / pallet
Container Load	520 pcs / 40'HQ, 204 pcs / 20'

Temperature coefficients curves

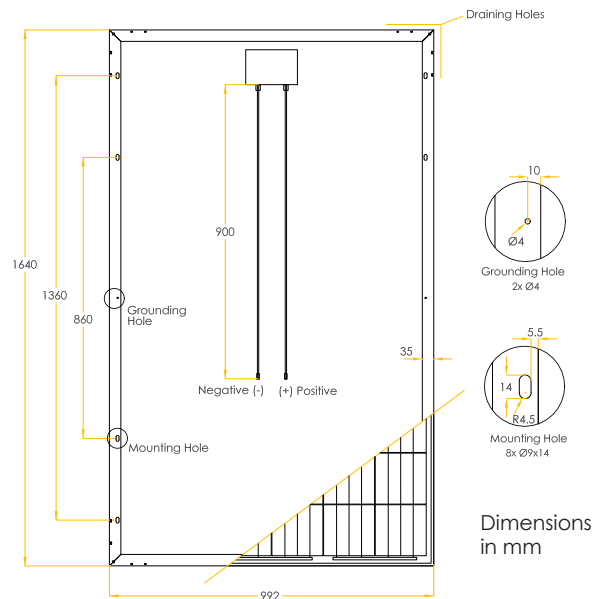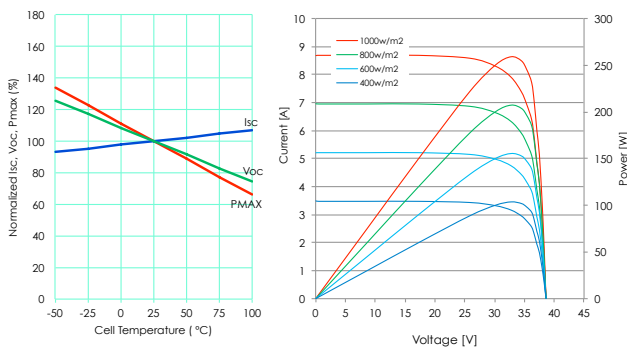

SS-SPE-12E004:4.1

Senersun and the Senersun logo are registered trademarks of Senersun Limited.
© 2012 Senersun Limited. All rights reserved.
Specifications included in this datasheet are subject to change without notice.

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THIS PRODUCT.

Visit www.senersun.com for more information.